

ARCHITECTURAL ROUND (TSR)

H.I.D.

The North Star Round series offers an excellent selection of accent luminaires which will compliment and also maintain the proper perspective of any type of building construction. Accent illumination of building facades, shopping centers, malls, hotels, condominiums, office complexes, entrances; interior or exterior.

- Mounting hardware is heavy duty and sized to safely support and compliment the overall appearance of each assembly.
- Optional accessories include black aluminum groove baffle and a clear or prismatic tempered glass lens.
- Pendant assembly supplied with 18" stem (optional lengths available).
- Porcelain medium base socket with a brass nickel plated screw shell.
- Fully gasketed housing and lens.

Lamps

35-100 Watt High Pressure Sodium (LS)

35-100 Watt Metal Halide (H)

Materials/Finish

Housing: Fabricated of rugged .156" thick one piece extruded aluminum. Finished in all weather polyester powder coating, standard in bronze, black, white and silver (optional colors available)

Reflector: Spun diffuse aluminum reflector is standard.

Installation/Mounting

Luminaire is available for pendant, ceiling, or for wall mounting applications.



Standard

UL listed for damp locations. Enclosed wall units are UL listed for wet locations.

Specification

To specify state:

An Architectural Round accent luminaire for pendant, ceiling, or wall mount. A fully gasketed, one piece, heavy duty .156" extruded aluminum housing with spun aluminum reflector and porcelain medium base socket with brass nickel plated screw shell.

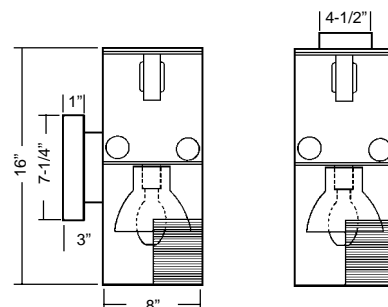

NORTH STAR LIGHTING INC.

2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com

ARCHITECTURAL ROUND (TSR)

INCANDESCENT

The North Star Round series offers an excellent selection of accent luminaires which will compliment and also maintain the proper perspective of any type of building construction. Accent illumination of building facades, shopping centers, malls, hotels, condominiums, office complexes, entrances; interior or exterior.

- Mounting hardware is heavy duty and sized to safely support and compliment the overall appearance of each assembly.
- Optional accessories include black aluminum groove baffle and a clear or prismatic tempered glass lens.
- Pendant assembly supplied with 18" stem (optional lengths available).
- Porcelain medium base socket with a brass nickel plated screw shell.
- Fully gasketed housing and lens.

Lamps

120 Watt maximum ER40 Incandescent
250 Watt maximum PAR38 Incandescent
300 Watt maximum R40 Incandescent

Materials/Finish

Housing: Fabricated of rugged .156" thick one piece extruded aluminum. Finished in all weather polyester powder coating, standard in bronze, black, white and silver (optional colors available)

Installation/Mounting

Luminaire is available for pendant, ceiling, or for wall mounting applications.





Standard

UL listed for damp locations. Enclosed wall units are UL listed for wet locations.

Specification

To specify state:

An architectural round accent luminaire for pendant, ceiling, or wall mount. A fully gasketed, one piece, heavy duty .156" extruded aluminum housing with spun aluminum reflector and porcelain medium base socket with brass nickel plated screw shell.

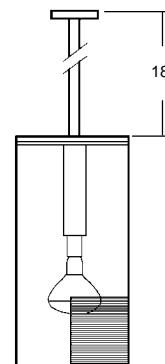


NORTH STAR LIGHTING INC.

2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com

ARCHITECTURAL ROUND (INC)

ORDERING EXAMPLE (Select desired item from each column)

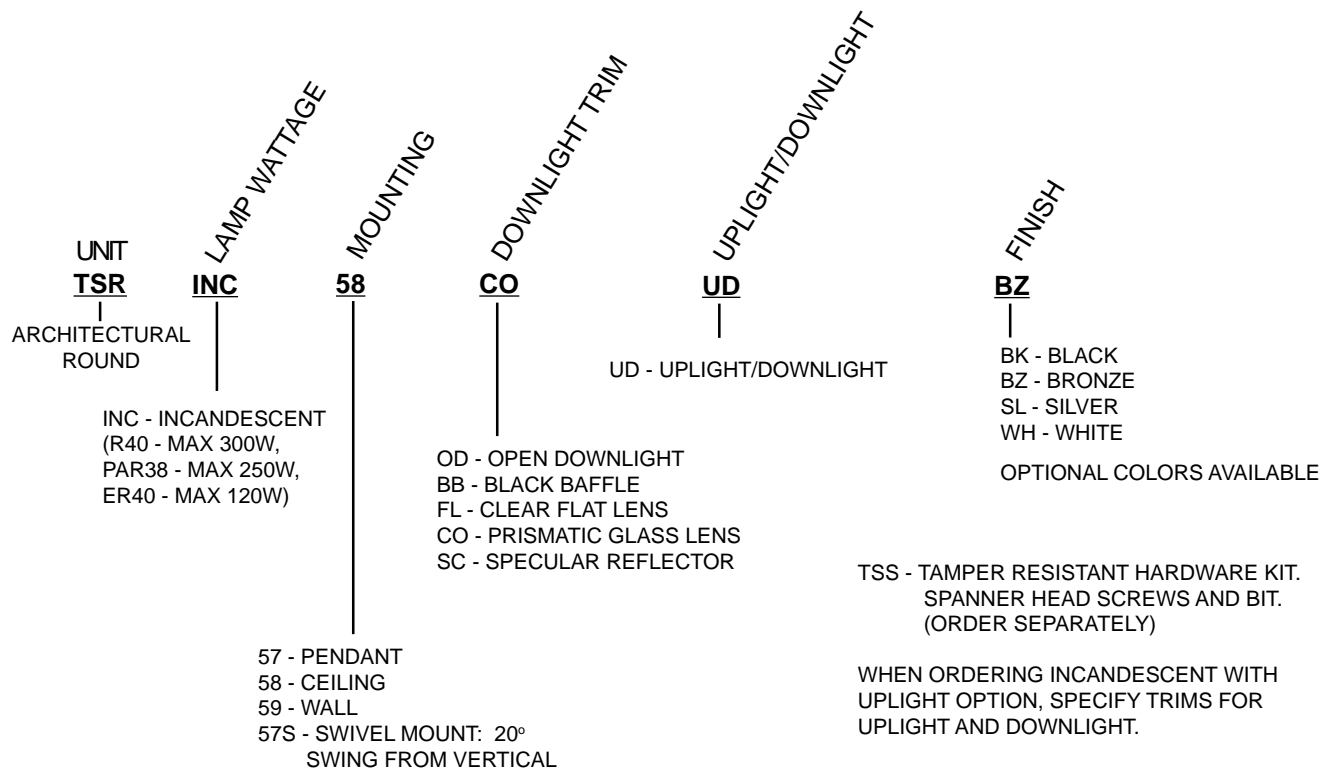

NORTH STAR LIGHTING INC.


2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com


PHOTOMETRICS

CANDLEPOWER DISTRIBUTION CURVES OF TYPICAL PAR AND R LAMPS


150PAR/SP

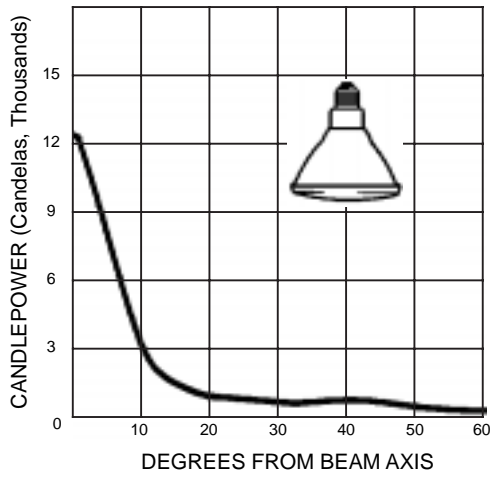


150PAR/FL

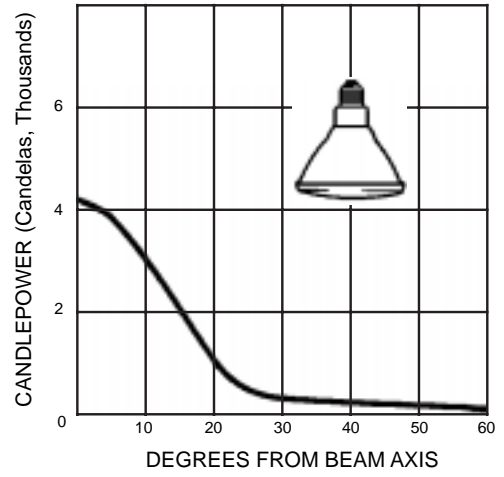

150R/SP

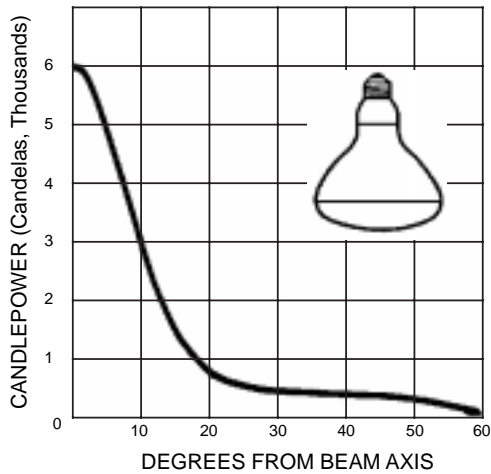

150R/FL

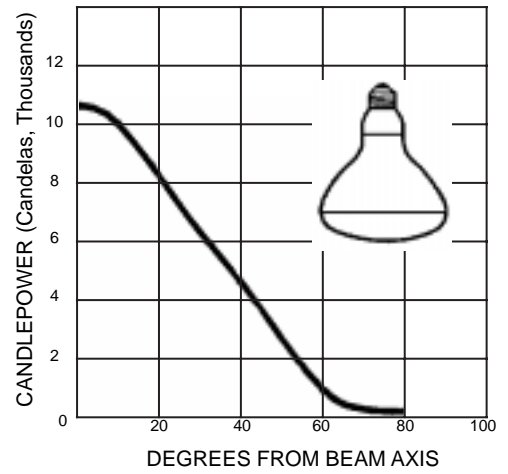

FOR FURTHER INFORMATION - CONSULT FACTORY




NORTH STAR LIGHTING INC.

2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com

ARCHITECTURAL ROUND (H.I.D.)

ORDERING EXAMPLE (Select desired item from each column)

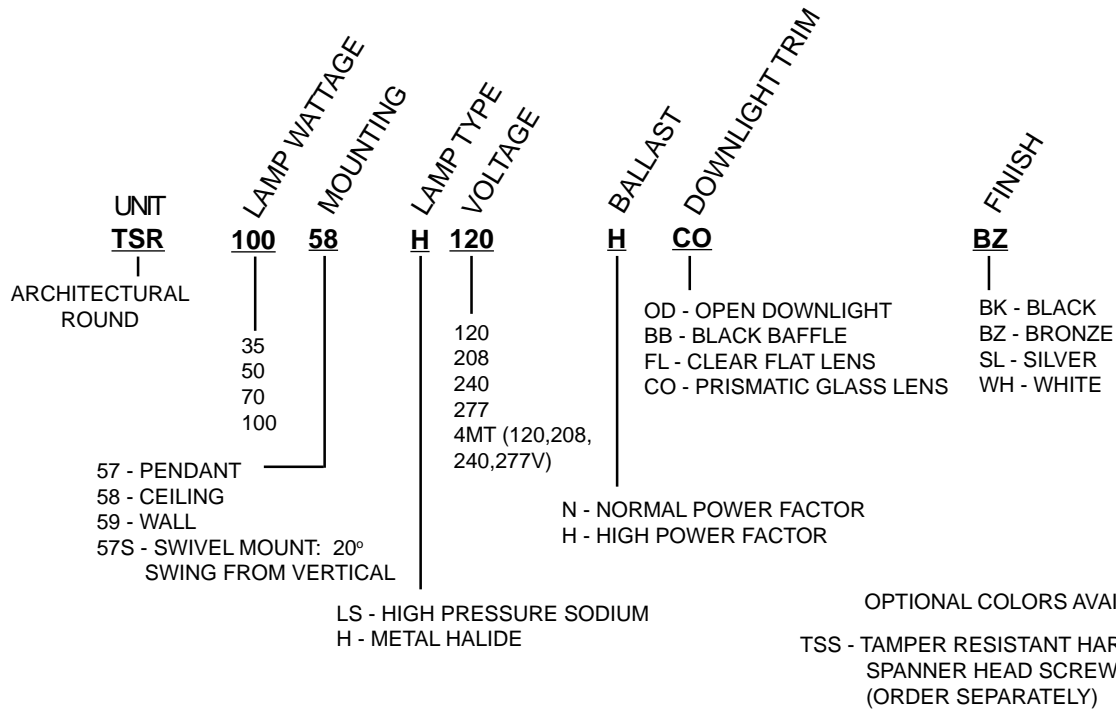


NORTH STAR LIGHTING INC.

2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com

PHOTOMETRICS

CATALOG NUMBER: TSR-100-59H-120H-BB
 LAMP: PHOSPHOR COATED METAL HALIDE
 REFLECTOR: EXTRUDED METAL CYLINDRICAL HOUSING,
 SPUN DIFFUSE ALUMINUM, BLACK PAINTED
 LOWER BAFFLE SECTION, OPEN BOTTOM
 LUMENS: PER 1,000 LAMP LUMENS
 EFFICIENCY: 34.6%
 CIE TYPE: DIRECT
 LUMINAIRE SPACING CRITERIA: 1.6

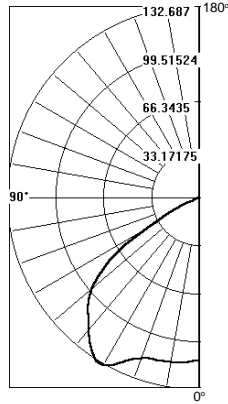

DEG	CANDELA	LUMENS
0	112.0	
5	113.0	11.0
15	115.0	33.0
25	124.0	58.0
35	129.0	80.0
45	108.0	83.0
55	75.0	66.0
65	12.0	14.0
75	0.3	0.4
85	0.0	0.0
90	0.0	

ZONAL LUMEN SUMMARY


ZONE	LUMENS	%LAMP	%FIXT
0-30	101.0	10.1	29.3
0-40	182.0	18.2	52.2
0-60	331.0	33.1	95.9
0-90	346.0	34.6	100.0
90-180	0.0	0.0	0.0
0-180	346.0	34.6	100.0

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	41	41	41	41	40	40	40	40	38	38	38	37	37	37	35	35	35	35			35
1	38	37	36	35	38	36	35	34	35	34	33	34	33	32	32	32	31	31			31
2	35	33	31	30	35	32	31	29	31	30	29	30	29	28	29	28	27	27			27
3	33	29	27	25	32	29	27	25	28	26	24	27	25	24	26	25	24	23			23
4	30	26	24	22	29	26	23	21	25	23	21	24	22	21	24	22	21	20			20
5	28	24	21	19	27	23	21	19	22	20	18	22	20	18	21	19	18	17			17
6	26	21	18	16	25	21	18	16	20	18	16	20	18	16	19	17	16	15			15
7	24	19	16	14	23	19	16	14	18	16	14	18	16	14	17	15	14	13			13
8	22	17	15	13	21	17	15	13	17	14	13	16	14	13	16	14	12	12			12
9	20	16	13	11	20	16	13	11	15	13	11	15	13	11	15	13	11	11			11
10	19	15	12	10	19	14	12	10	14	12	10	14	12	10	14	12	10	9			9

LUMENS: PER 1000 LAMP LUMENS. FOR OTHER LAMP LUMEN RATINGS, MULTIPLY CANDELA AND LUMEN VALUES BY THE NUMBER: LUMENS DIVIDED BY 1000.

CATALOG NUMBER: TSR-100-58H-120H-FL
 LAMP: PHOSPHOR COATED METAL HALIDE
 REFLECTOR: EXTRUDED METAL CYLINDRICAL HOUSING,
 SEMI-SPECULAR GENERAL INTERIOR, SPUN
 DIFFUSE ALUMINUM, CLEAR FLAT GLASS
 ENCLOSURE IN METAL TRIM RING
 LUMENS: PER 1,000 LAMP LUMENS
 EFFICIENCY: 31.3%
 CIE TYPE: DIRECT
 LUMINAIRE SPACING CRITERIA: 1.4

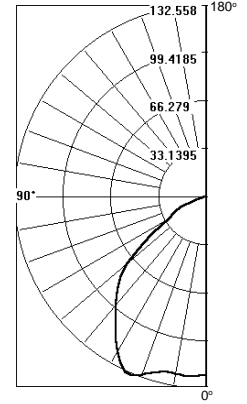

DEG	CANDELA	LUMENS
0	122.0	
5	123.0	12.0
15	124.0	35.0
25	132.0	60.0
35	108.0	68.0
45	86.0	66.0
55	47.0	42.0
65	24.0	22.0
75	6.0	6.0
85	0.8	1.0
90	0.0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LAMP	%FIXT
0-30	107.0	10.7	34.3
0-40	175.0	17.5	56.0
0-60	283.0	28.3	90.5
0-90	313.0	31.3	100.0
90-180	0.0	0.0	0.0
0-180	313.0	31.3	100.0

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	37	37	37	37	36	36	36	36	35	35	35	33	33	33	32	32	32	31			31
1	35	33	32	31	34	33	32	31	31	31	30	30	30	29	29	29	28	28			28
2	32	30	28	27	31	29	28	26	28	27	26	27	26	25	26	25	24	24			24
3	30	27	24	23	29	26	24	22	25	24	22	24	23	22	24	22	21	21			21
4	27	24	21	20	27	23	21	19	23	21	19	22	20	19	21	20	19	18			18
5	25	22	19	17	25	21	19	17	21	18	17	20	18	17	19	18	16	16			16
6	23	20	17	15	23	19	17	15	19	17	15	18	16	15	18	16	15	14			14
7	22	18	15	13	21	18	15	13	17	15	13	17	15	13	16	14	13	13			13
8	20	16	14	12	20	16	14	12	16	13	12	15	13	12	15	13	12	11			11
9	19	15	13	11	18	15	12	11	14	12	11	14	12	11	14	12	11	10			10
10	18	14	11	10	17	14	11	10	13	11	10	13	11	10	13	11	10	9			9

FOR FURTHER INFORMATION - CONSULT FACTORY



NORTH STAR LIGHTING INC.

2150 PARKES DRIVE ♦ P.O. BOX 6038 ♦ BROADVIEW, ILLINOIS ♦ 60155-6038 ♦ 708-681-4330 ♦ FAX 708-681-4006

Web Site: www.nslights.com